


SERIES 403 STOREFRONT FRAMING



Shear Block • Screw Spline

This economical 2" X 4-1/2" flush glaze system is available in both shear block and screw spline fabrication methods. Series 403 Storefront can accommodate all standard 1 3/4" Entrances as well as WV410 vents. This series is thermally broken, enhancing energy savings potential. Vertical mullions will accept steel reinforcement to enhance structural performance.

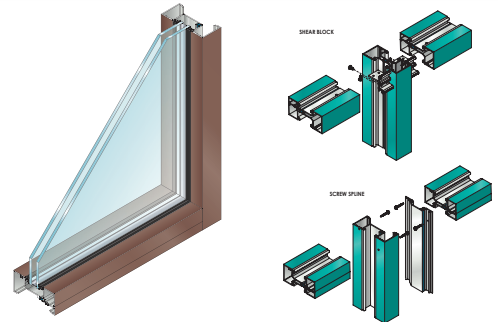

STRUCTURAL LOAD <small>(ASTM E330)</small> VISIT EFCOCORP.COM		WATER RESISTANCE <small>(ASTM E547 & E331)</small> 12 PSF	
AIR INFILTRATION <small>(ASTM E283)</small> 0.06 CFM/FT ²		CRF <small>(AAMA 1503)</small> SCREW SPLINE 57	
U-FACTOR* <small>(ANSI/NFRC 100/200)</small> SCREW SPLINE 0.34-0.55		OITC* <small>(ASTM E90 & E413)</small> SCREW SPLINE 30	
STC* <small>(ASTM E90 & E413)</small> SCREW SPLINE 34			

STANDARD FEATURES

- Thermally broken frames
- Screw spline construction
- Shear block construction
- The optional Roto-Vent ventilator
- 2-way corner mullions (90° & 135°)
- 3-way corner mullions (T-mullions)
- 0° - 15° and 15° - 30° variable mullions
- Accommodates up to 1-1/8" glazing
- Uniform glazing gasket is used for exterior and interior
- Various height intermediate horizontals and sills
- Accessory line of perimeter anchors, pocket fillers, door adaptors, etc.
- Anodized or painted finished available

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.