


837 HEADER
5600 6"

ERASE NOTE:
OUTSWING HEAD FOR SURFACE CLOSERS

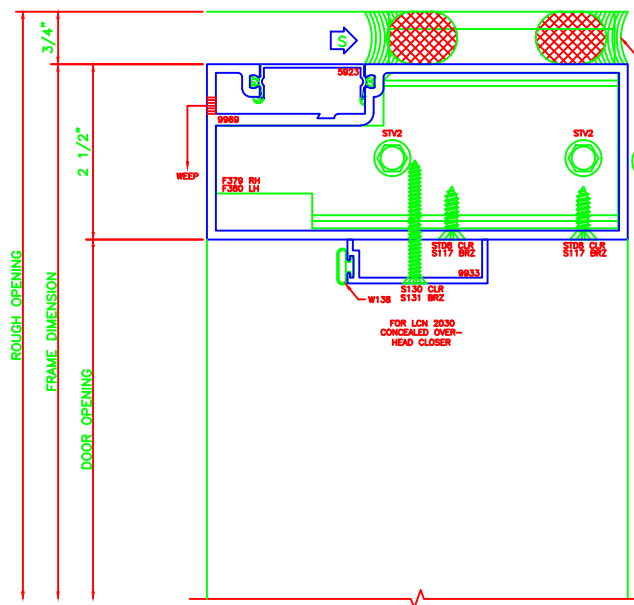

828 C.O.C. HEAD
5600 6"

ERASE NOTE:
FOR DORMA CONCEALED OVER-HEAD CLOSER



841 O.G. VERT.
5600 6"

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 12S6

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 12S6

842 O.G. VERT.
5600 6"

ERECTOR NOTE:
APPLY CONTINUOUS BEAD OF SEALANT AROUND SHEAR BLOCK PRIOR TO SETTING MULLION IN PLACE.

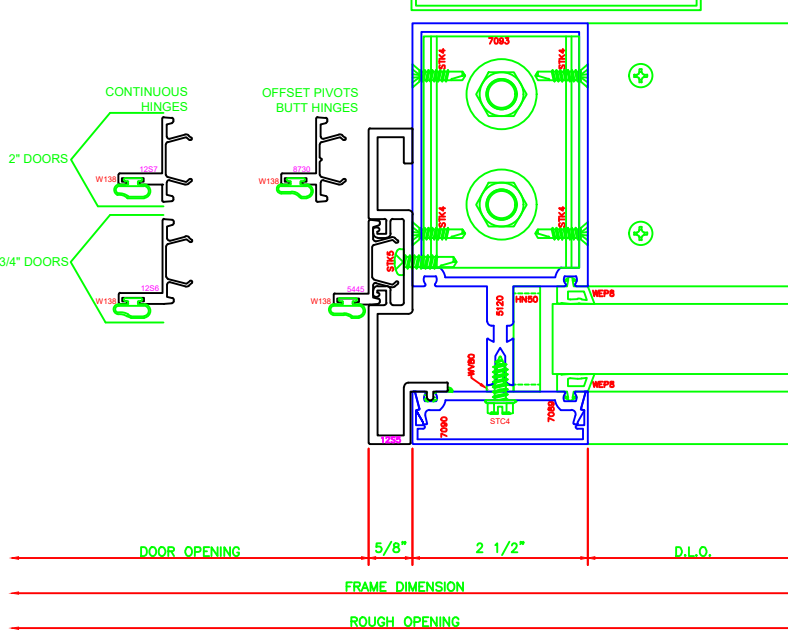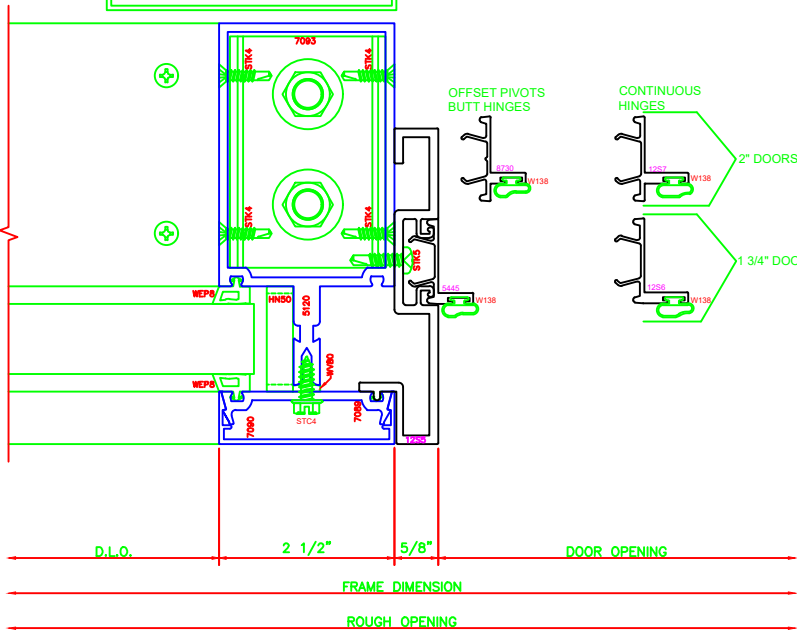

838 O.G. JAMB
5600 6"

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 12S6

ERASE NOTE:
OUTSWING JAMB FOR OFFSET PIVOTS OR BUTT HINGE AS SHOWN, CONTINUOUS HINGE REQUIRES 12S6

839 O.G. JAMB
5600 6"

