



430	JAMB
	325 CASEMENT IN 4-BAR ARMS

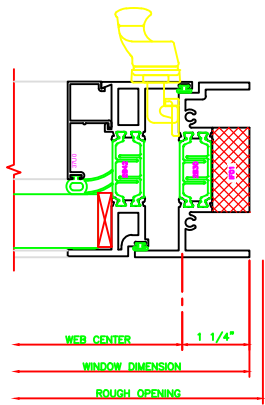


431	JAMB
	325 CASEMENT IN CAM LOCK

ERECTOR NOTE:
 THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.




432	JAMB
	325 CASEMENT IN BUTT HINGES


130	HEAD
	325 CASEMENT IN 4-BAR ARM

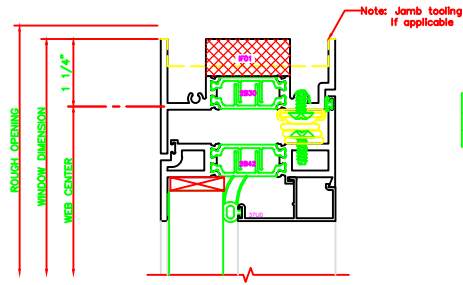

131	HEAD
	325 CASEMENT IN BUTT HINGES

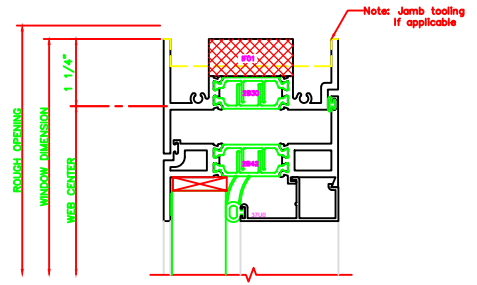

230	SILL
	325 CASEMENT IN 4-BAR ARMS

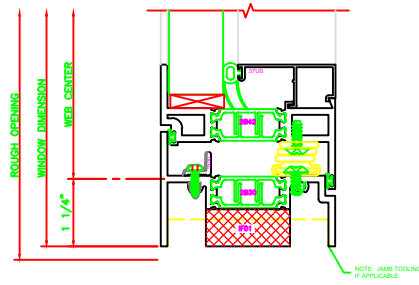

231	SILL
	325 CASEMENT IN BUTT HINGES

