


|     |                                           |
|-----|-------------------------------------------|
| 430 | JAMB                                      |
|     | SERIES: 450X<br>CASEMENT IN<br>4-BAR ARMS |


|     |                         |
|-----|-------------------------|
| 632 | MEETING RAIL            |
|     | SERIES: 450X<br>C./C.L. |

|     |                                           |
|-----|-------------------------------------------|
| 130 | HEAD                                      |
|     | SERIES: 450X<br>CASEMENT IN<br>4-BAR ARMS |


|     |                                           |
|-----|-------------------------------------------|
| 230 | SILL                                      |
|     | SERIES: 450X<br>CASEMENT IN<br>4-BAR ARMS |

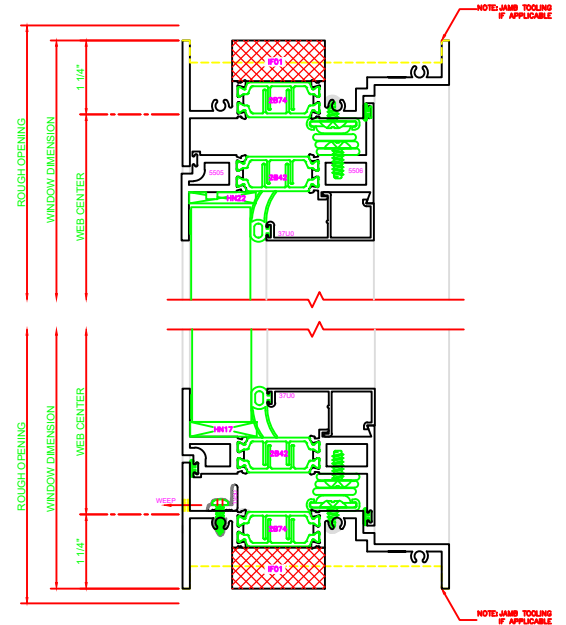

## 4-BAR ARMS BUTT HINGE

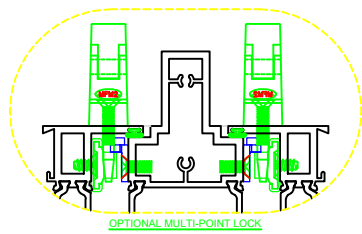

**ERECTOR NOTE:**  
THE HINGED JAMB FRAME SHALL BE INSTALLED PLUMB. ALL HINGES SHALL BE SECURELY BLOCKED AND ANCHORED TO THE CONDITION THROUGH THE HINGES OR AS CLOSE AS POSSIBLE TO THE HINGES.

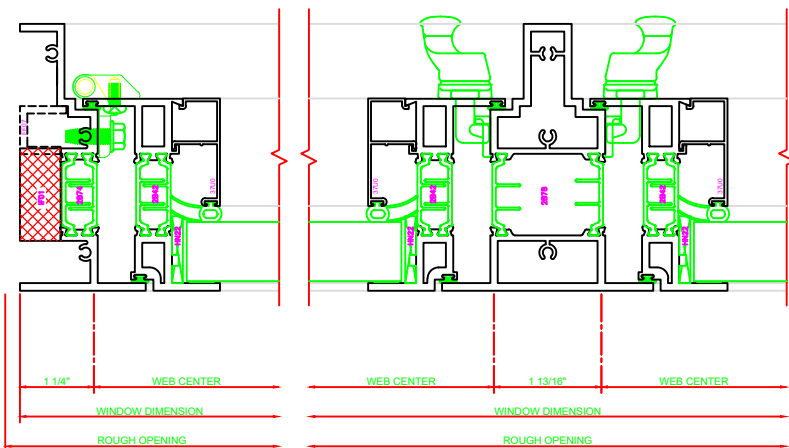

|     |                                           |
|-----|-------------------------------------------|
| 432 | JAMB                                      |
|     | SERIES: 450X<br>CASEMENT IN<br>BUTT HINGE |

|     |                         |
|-----|-------------------------|
| 632 | MEETING RAIL            |
|     | SERIES: 450X<br>C./C.L. |

|     |                                           |
|-----|-------------------------------------------|
| 131 | HEAD                                      |
|     | SERIES: 450X<br>CASEMENT IN<br>BUTT HINGE |

|     |                                           |
|-----|-------------------------------------------|
| 231 | SILL                                      |
|     | SERIES: 450X<br>CASEMENT IN<br>BUTT HINGE |

