









SYSTEM 5500X CURTAIN WALL

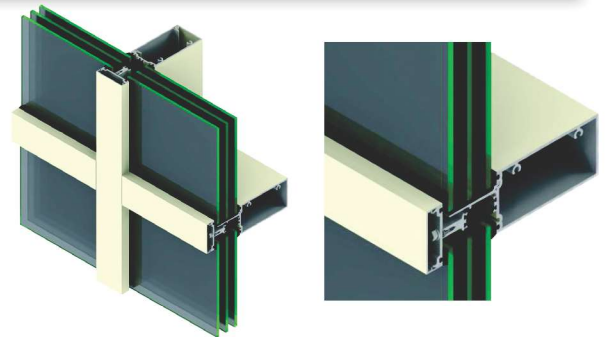

Outside Glazed • 2-sided Structural Silicone Glazed
 The 5500X is EFCO's newest 2 1/2" wide curtain wall system that offers extraordinary thermal performance using a 38mm E-Strut™ which can achieve values as low as .19 U-factor. Available in system depths of 7" and 8" as well as an extensive library of accessories provides a wide range of configuration and applications to meet about any thermally demanding specification and aesthetic design.



<p>STRUCTURAL LOAD (ASTM E330) VISIT EFCOCORP.COM</p> 	<p>WATER RESISTANCE (ASTM E547 & E331) 15 PSF TARGET</p> 
<p>AIR INFILTRATION (ASTM E283) 0.06 CFM/FT²</p> 	<p>CRF (AAMA 1503) 80</p> 
<p>U-FACTOR* (ANSI/NFRC 100/200) 0.20 - 0.36</p> 	<p>OITC* (ASTM E90 & E413) 32</p> 
<p>STC* (ASTM E90 & E413) 40</p> 	

STANDARD FEATURES

- 38mm E-Strut thermal isolator
- 7" and 8" mullion depth available
- Screw spline construction
- Accommodates up to 2-1/4" infill
- Wide variety of snap-on face covers
- Integral door adaptors
- Anodized Class I and painted finishes (AAMA 2604 & 2605) available

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.